InfoSight

LDAR TwinTag [™]

Leak Detection and Repair Tags



- For industrial applications regulated for fugitive emissions of volatile organic compounds (VOC)
- Resistant to:
 - Heat—1800°F (982°C)
 - Chemicals—see reverse
 - Abrasion
 - UV Exposure
- 3" (76mm) Wide X 1.5" (38mm) Long
- Yellow & White tags available
- Metal substrate with laser markable coating
- Durable, easy to read tags that won't rust or fade.
- On demand printing allows P&ID identification numbers to remain constant.
- Two colors for color coding potential leak points.
- LDAR TwinTag[™] design provides stronger attachment and is readable from both sides.
- Printed on InfoSight LabeLase[®] Printers with high contrast alphanumeric characters, graphics, and 1D & 2D barcodes.



Find out how easy it is to design and print your tags with a LabeLase[®] Metal Tag Printer & free Producer[™] Software.




LDAR TWINTAGS[™] SIMPLIFY LDAR COMPLIANCE

InfoSight Corporation 20700 U.S. Highway 23 Chillicothe, Ohio 45601 USA

WE BARCODE DIFFICULT STUFF. ®

LDAR TwinTag [™]

Technical Specifications

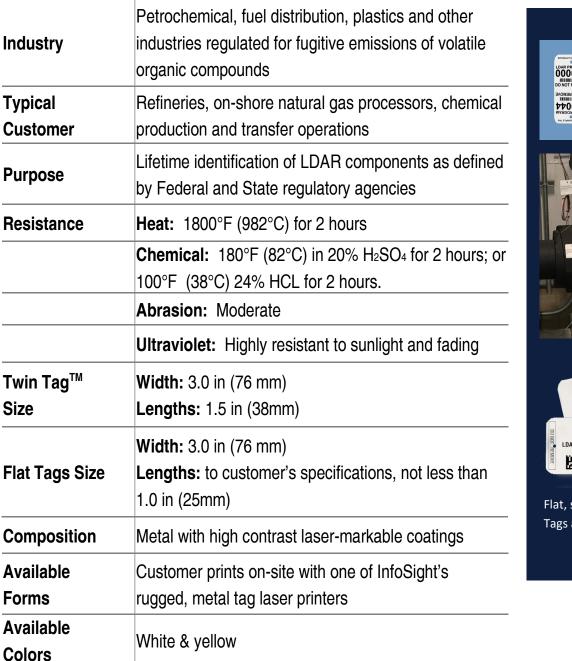







Flat, single sided LDAR Tags are also available.